AUTODOC CLUB

How to change front brake pad wear sensor on **BMW E82** – replacement guide

VIDEO TUTORIAL




Important!

This replacement procedure can be used for:
BMW 3 Touring (E91) 318i 2.0, BMW 3 Touring (E91) 316d 2.0, BMW 1 Coupe (E82) 118d 2.0, BMW 3 Coupe (E92) 318i 2.0, BMW 3 Convertible (E93) 318i 2.0, BMW 3 Convertible (E93) 325d 3.0, BMW 1 Hatchback (E81) 116i 1.6, BMW 1 Hatchback (E81) 120d 2.0, BMW 3 Saloon (E90) 320i 2.0, BMW 3 Saloon (E90) 325i 2.5, BMW 3 Saloon (E90) 330i 3.0, BMW 3 Saloon (E90) 320d 2.0, BMW 1 Hatchback (E81) 130i 3.0, BMW 3 Touring (E91) 320i 2.0, BMW 3 Touring (E91) 325i 2.5, (+ 81)

The steps may slightly vary depending on the car design.

REPLACEMENT: BRAKE PAD WEAR SENSOR – BMW E82. TOOLS YOU'LL NEED:

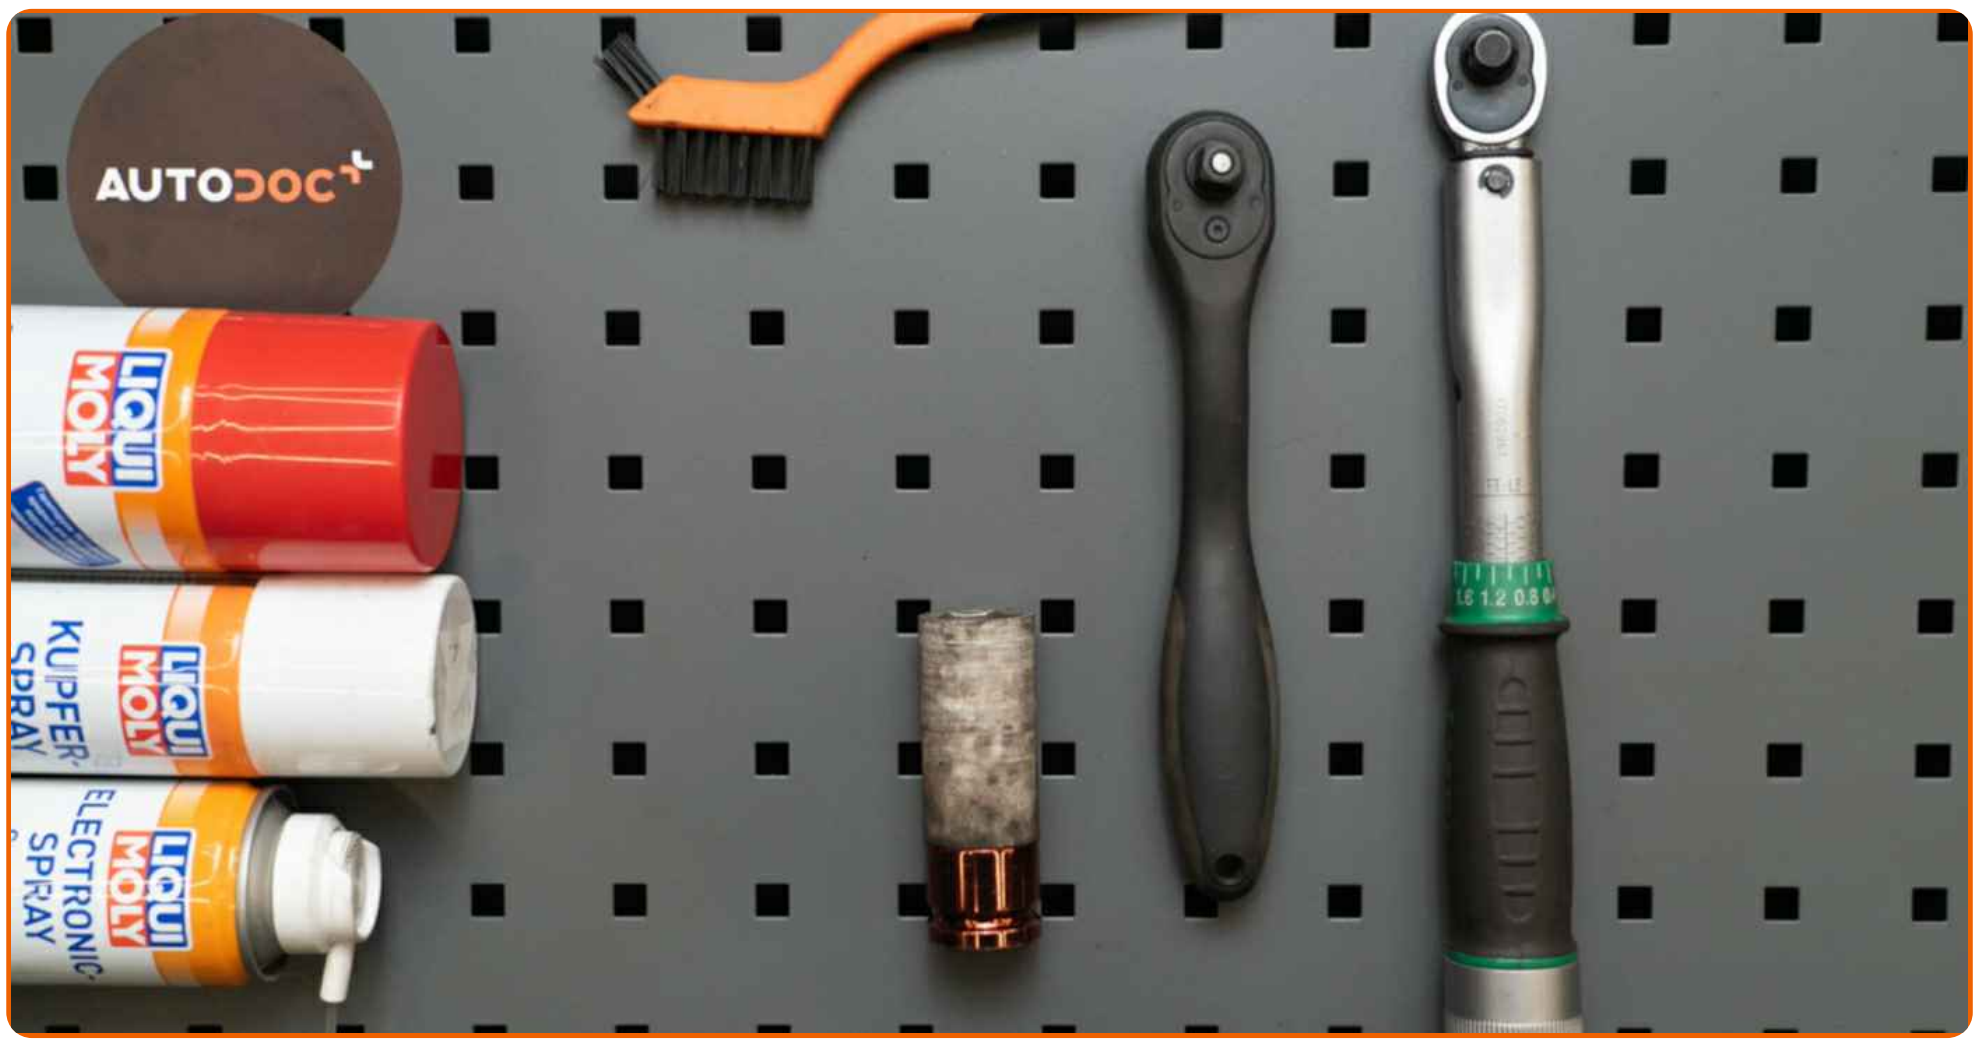

- Nylon cleaning brush
- Electronic spray
- Brake cleaner
- Copper grease
- Wheel impact socket #17
- Torque wrench
- Wheel chock

BUY TOOLS

Replacement: brake pad wear sensor – BMW E82. AUTODOC recommends:

- The replacement procedure is identical for both brake pad wear sensors on the same axle.
- All work should be done with the engine stopped.

REPLACEMENT: BRAKE PAD WEAR SENSOR – BMW E82. RECOMMENDED SEQUENCE OF STEPS:

1 Secure the wheels with chocks.



2 Loosen the wheel mounting bolts. Use wheel impact socket #17.



3 Raise the front of the car and secure on supports.



4 Unscrew the wheel bolts.



Replacement: brake pad wear sensor – BMW E82. AUTODOC experts recommend:

- To avoid injury, hold up the wheel when unscrewing the bolts.


5 Remove the wheel.




6 Remove the brake pad wear sensor from the brake pad.




7 Disconnect the brake pads wear sensor.

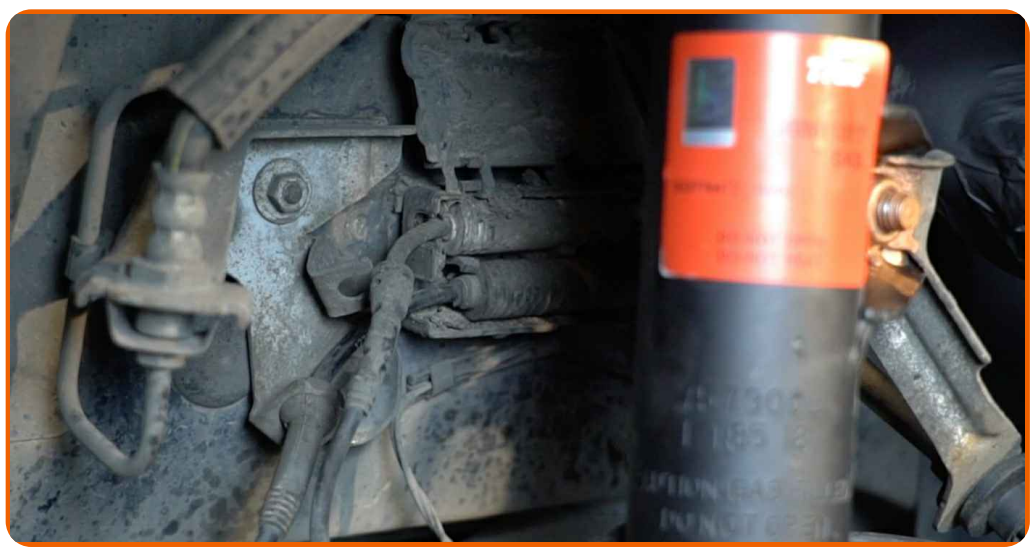


8 Clean the brake pad wear sensor plug. Use a nylon cleaning brush.

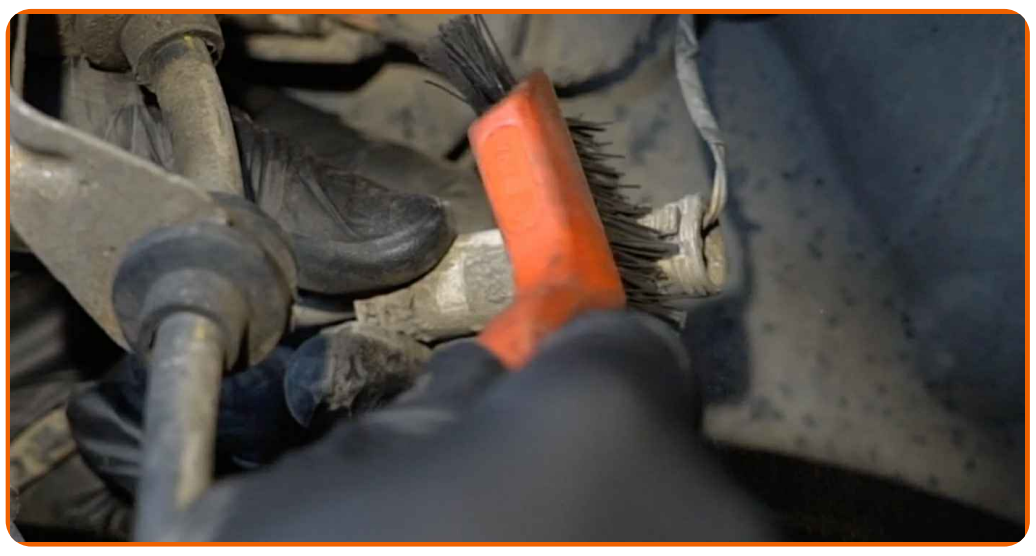


9 Disconnect the brake pad wear sensor plug.

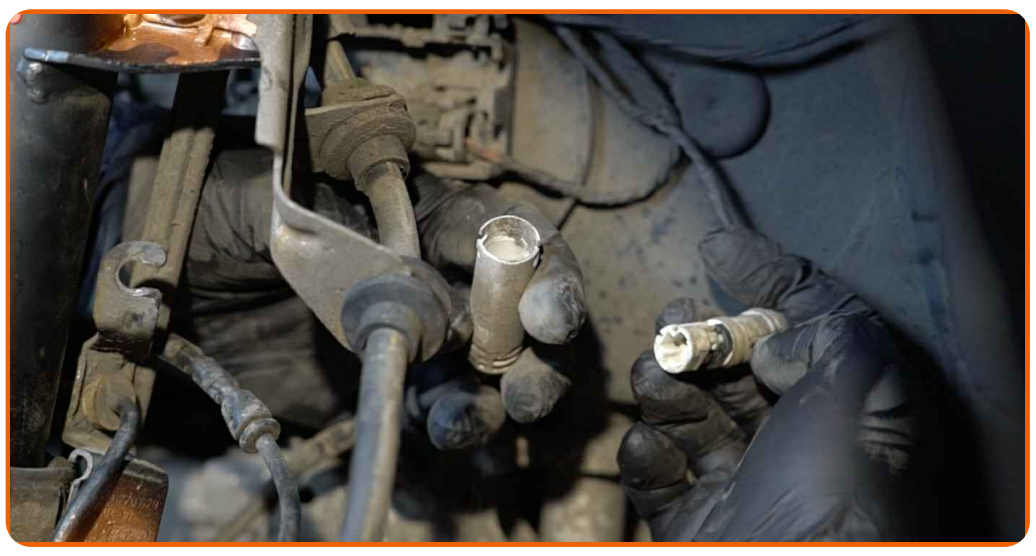


10 Treat the brake pad wear sensor plug. Use dielectric grease.

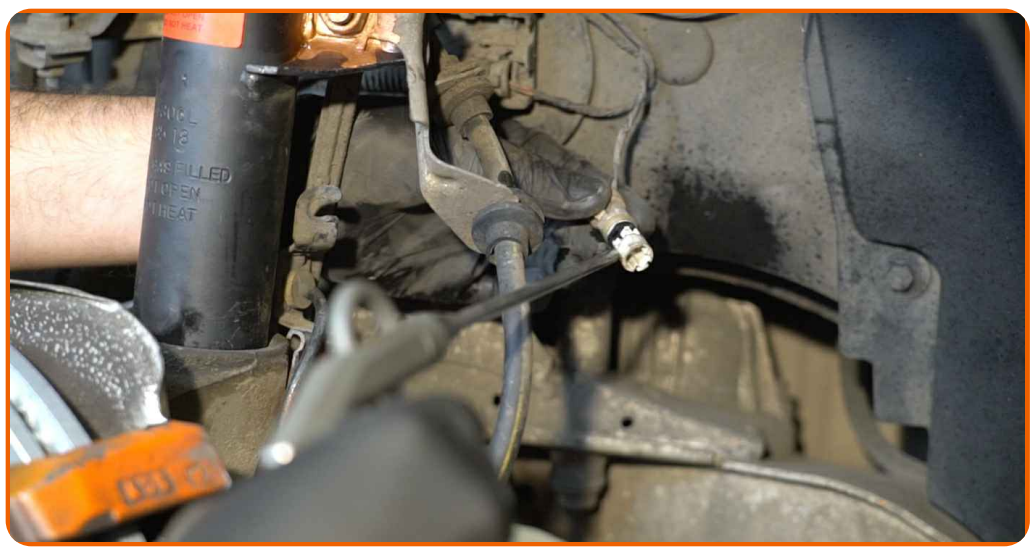

11 Connect the brake pad wear sensor plug.

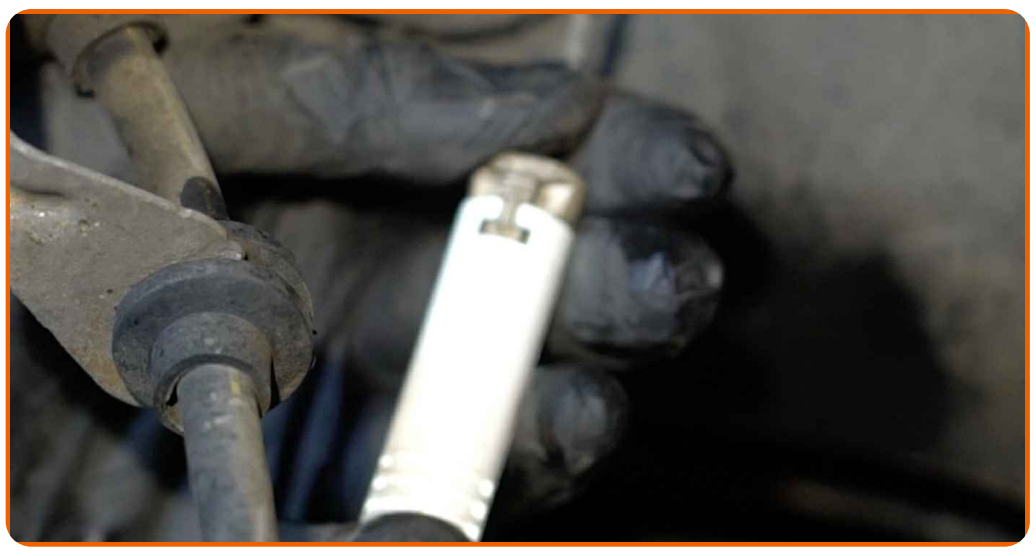

12 Connect the brake pads wear sensor.

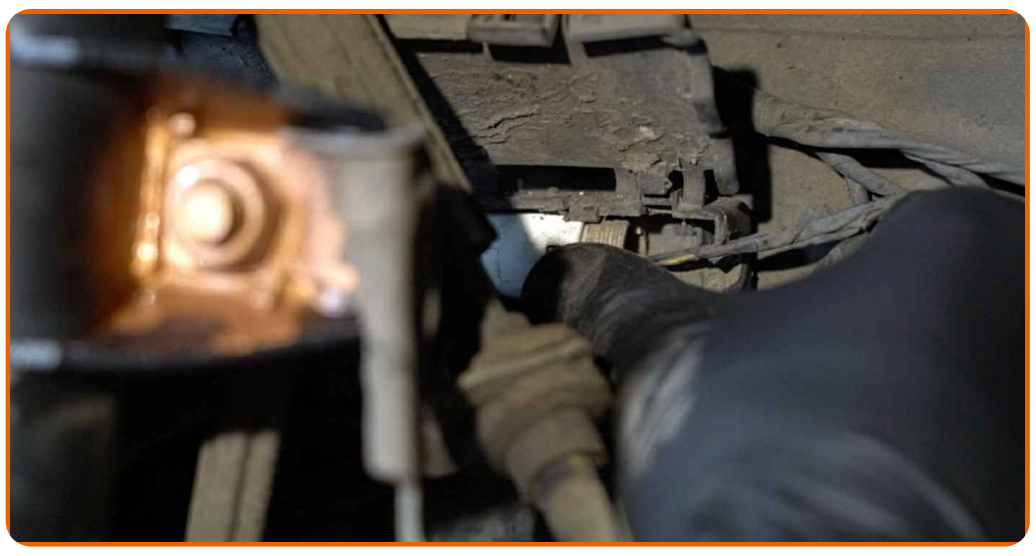

13 Install the wear sensor on the brake pads.



14 Treat the surface where the brake disc contacts the wheel rim. Use copper grease.



15 Clean the brake disk surface. Use a brake cleaner.



AUTODOC recommends:

- Replacement: brake pad wear sensor – BMW E82. After applying the spray, wait a few minutes.

16

Install the wheel.



Replacement: brake pad wear sensor – BMW E82. Tip:

- To avoid injury, hold up the wheel when screwing in the fastening bolts.

17

Screw in the wheel bolts. Use wheel impact socket #17.



18

Lower the car and working in a cross order, tighten the wheel bolts. Use wheel impact socket #17. Use a torque wrench. Tighten it to 120 Nm torque.



19 Remove the jacks and chocks.




WELL DONE!

VIEW MORE TUTORIALS

AUTODOC — TOP QUALITY AND AFFORDABLE CAR PARTS ONLINE

AUTODOC MOBILE APP: GREAT DEALS AND CONVENIENT SHOPPING

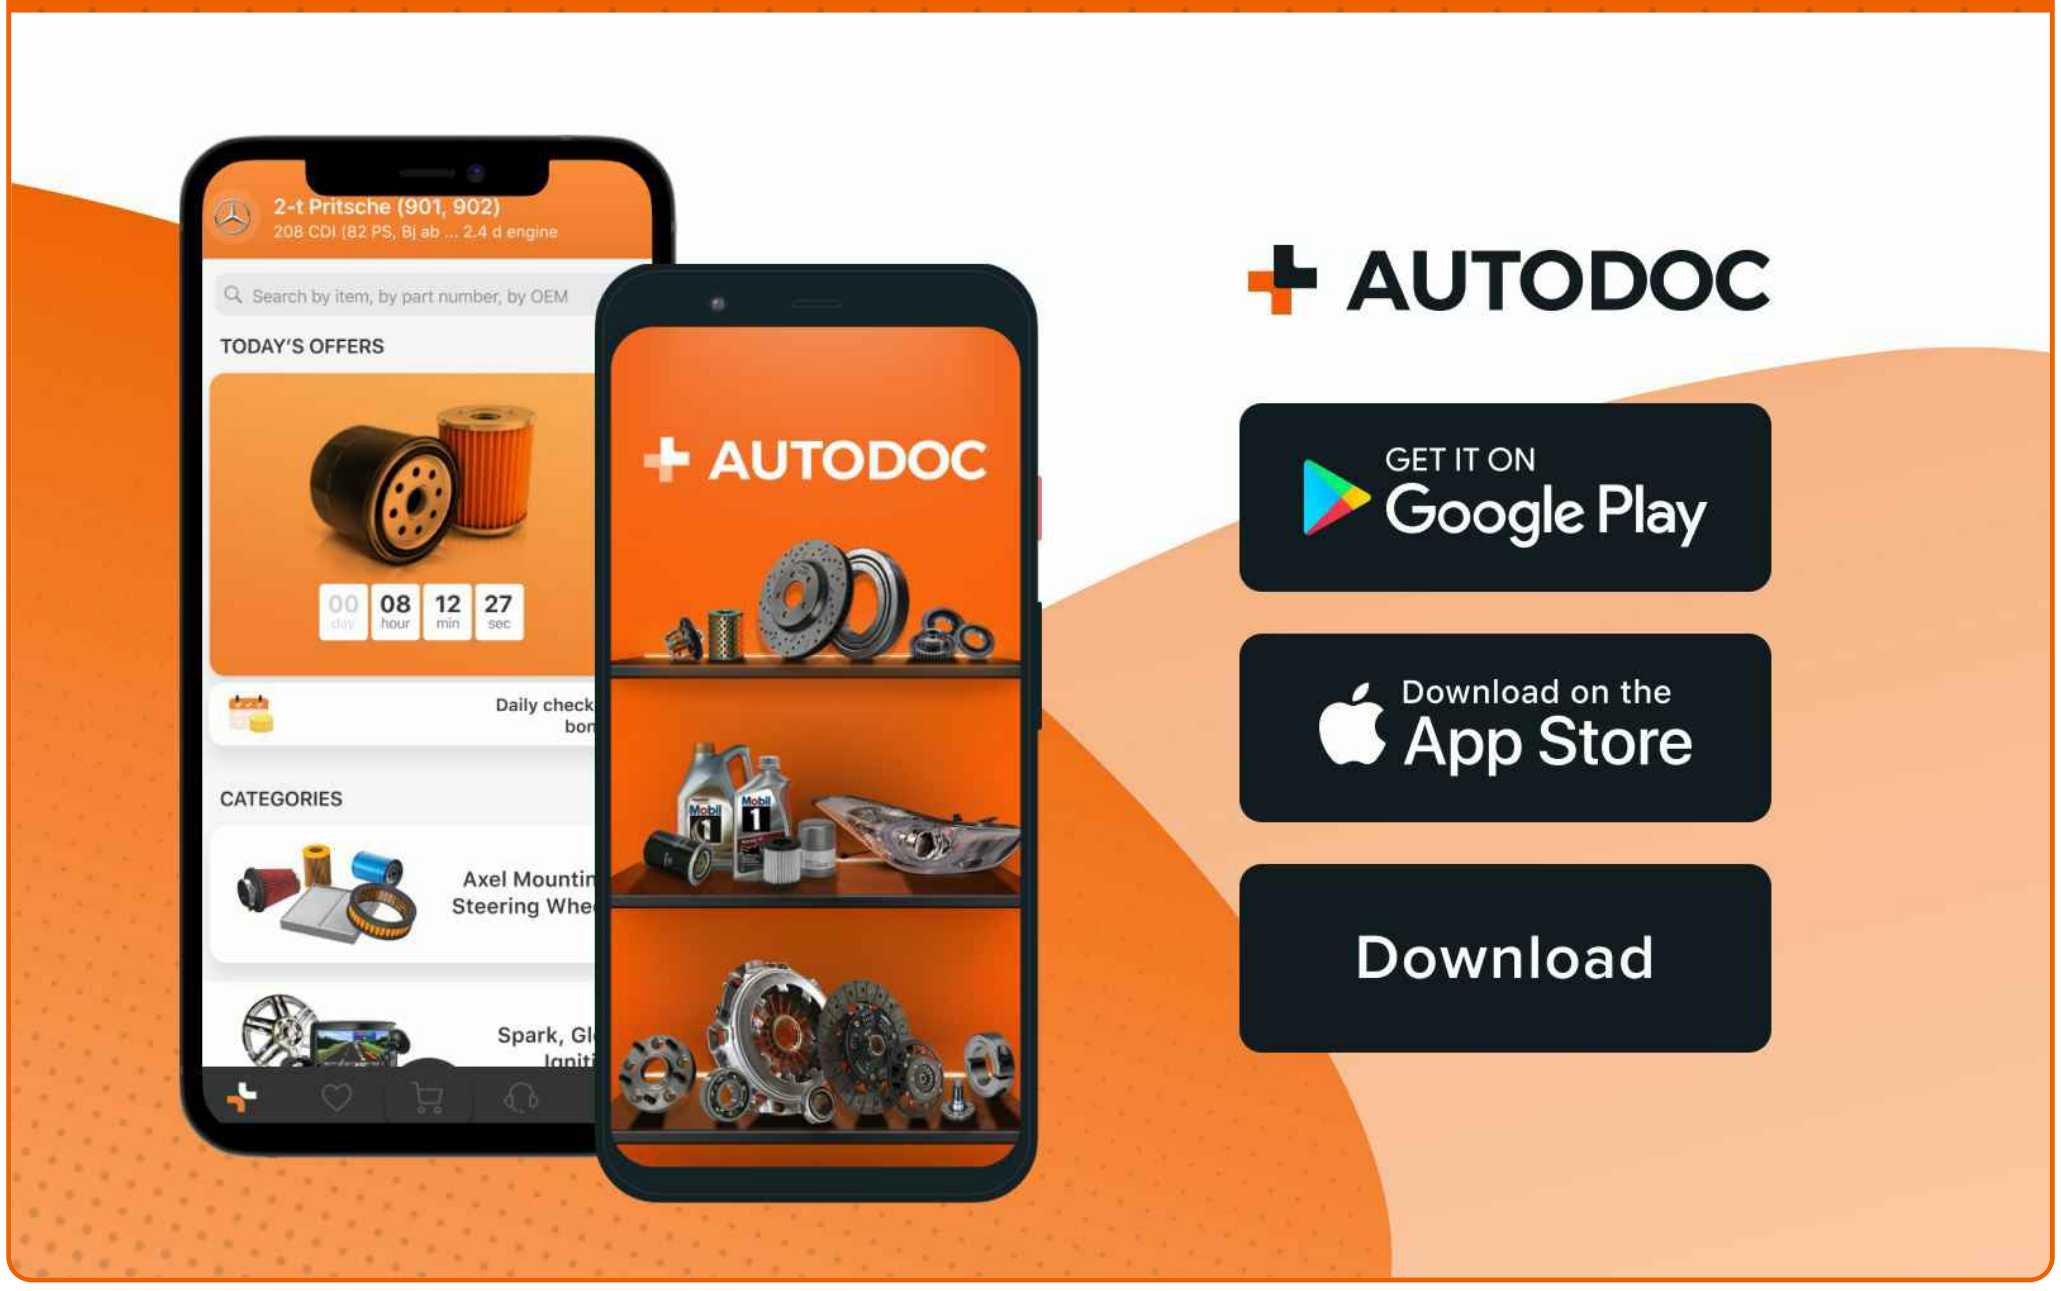

A GREAT SELECTION OF SPARE PARTS FOR YOUR CAR

BUY SPARE PARTS FOR BMW

BRAKE PAD WEAR SENSOR: A WIDE SELECTION

CHOOSE CAR PARTS FOR BMW E82

BRAKE PAD WEAR SENSOR FOR BMW: BUY NOW

BRAKE PAD WEAR SENSOR FOR BMW E82: THE BEST DEALS & OFFERS

ⓘ DISCLAIMER:

The document contains only general recommendations that may be useful for you when you perform repair or replacement work. AUTODOC shall not be liable for any loss, injury, damage of property occurring in the repair or replacement process due to incorrect use or misinterpretation of the provided information.

AUTODOC shall not be liable for any possible mistakes and uncertainties in this guide. The information provided is for information purposes only and cannot replace advice from specialists.

AUTODOC shall not be liable for incorrect or hazardous usage of equipment, tools and car parts. AUTODOC strongly recommends to be careful and observe the safety rules when performing repair or replacement works. Remember: usage of low quality auto parts does not guarantee you the appropriate level of road safety.